





ANTHOLOGY
WOODS

SPECIFIER'S GUIDE
+ TECHNICAL DATA


HERITAGE OAK

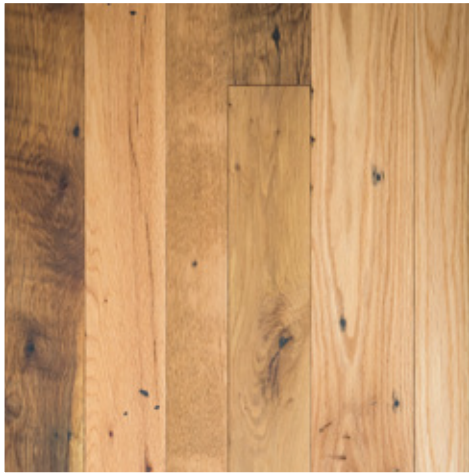

STANDARD FINISHES



POLY FINISH



OIL FINISH



CUSTOM
FINISHES
ALSO AVAILABLE

DESCRIPTION

Reclaimed Heritage Oak flooring and cladding embraces the rich color, grain, depth and character inherent to reclaimed wood. Sourced from barns, warehouses and other sources in the eastern U.S., it retains the natural and man-made characteristics that embody a true reclaimed spirit. Smooth surface, deep rich color and grain diversity, warm earthy tones with characteristic oak hardness and durability.

SPECIES

Quercus alba and Quercus rubra

MILLWORK

Surfaced 4 sides with profile as per specification. Flooring products are back-relieved & end-matched. Custom millwork & dimensions available.

FLOORING + CLADDING DIMENSIONS

SOLID: 5/8" thick x 4-7/8" width x 1'-10' solid random lengths (or longer, if available)

ENGINEERED: 5/8" thick x 4-7/8" width x 1'-10' solid random lengths (or longer, if available). Wear layer 5/32" (4mm) thick over a 1/2" (12mm) thick plywood substrate.

THINCLAD DIMENSIONS

3/8" thick x 5" face width x 1'-10' solid random lengths (or longer, if available)

SOURCE

Post-consumer FSC Certified Recycled from sources including barns, out-buildings, warehouses and factories

SUSTAINABILITY

FSC® CERTIFIED: Recycled

LEED V4

Building Product Disclosure & Optimization Regional Priority

Building Life-Cycle Impact Reduction

Low-Emitting Materials

Material Ingredients

DECLARE LABEL: Red List Approved for Unfinished, Oil & Poly Finishes

GREENGUARD GOLD: Standard Oil & Poly Finishes are Greenguard Gold Certified

HARDNESS

White Oak Janka rating 1360, Red Oak Janka rating 1290. Suitable for high-traffic indoor environments

GRADE

Infrequent to frequent fastener holes, insect holes, tight knots, or filled split knots, occasional staining/discoloration & other signs of previous use. Holes over 1/8" are black epoxy-filled on pre-finished flooring products.

FLAME SPREAD

USDA FSI Red Oak: 100; White Oak: 100 (class C). Class A flame retardant coatings are available.

APPLICATION


Flooring, Interior Cladding, Stair Treads, Tables, Benches & Custom Applications

MINIMUM ORDER

250 sq.ft. or 500 sq.ft. for engineered

LEAD TIME

2-6 Weeks (or less)




Note: Wood is a natural substance and varies in appearance. Please refer to product images or request samples for a broader representation of the color and character of your selection.

APPLICATION	STANDARD WIDTH(S)	OTHER WIDTH(S)	THICKNESS	FINISH	PROFILE
Flooring + Interior Cladding	4-7/8" Fixed	3-10"	5/8" Thick	Unfinished, Oil or Poly	T+G
ThinClad Interior Cladding	5" Fixed	3, 4, 5" Mixed	3/8" Thick	Unfinished, Oil or Poly	T+G
Engineered Flooring	4-7/8" Fixed	3-10"	5/8" Thick	Unfinished, Oil or Poly	T+G Micro-Bevel

A variety of fixed and mixed widths are available up to 10" wide. Custom factory stains and finishes available on all products. Oil finish in place recommended for best results with solid flooring. Please inquire for more information.

Inquire to create your custom specification




TONGUE + GROOVE

Standard profile (other profiles available)




T+G: MICRO BEVEL

Standard on most engineered products, recommended for most pre-finished items & wall cladding



T+G: THINCLAD MICRO-BEVEL

Recommended for interior wall cladding



T+G: ENGINEERED WITH MICRO-BEVEL

Recommended for flooring installed over concrete sub-floor



FINISHES

We apply low-VOC and eco-friendly finishes to enhance the natural beauty of the wood for durability and easy maintenance.

CUSTOMIZATION

We offer custom specifications for this product, including dimensions, finishes and profiles for a unique look. Please inquire.

PATTERNS

We can manufacture the engineered product in a variety of patterns, including chevron and herringbone patterns.



ANTHOLOGY WOODS

1.800.293.8178
www.anthologywoods.com
info@anthologywoods.com